

KVY-TRBND-ELT

OMNIDIRECTIONAL



VERSİYON: 1.2

TARİH: 17.05.2022


KUVAYI TECHNOLOGIES A.Ş

ELEKTRİKSEL 	
Model	KVY-TRBND-ELT
Frekans	121.5 / 243 / 406 MHz
Isıma Örüntüsü	Omni Directional
Polarizasyon	Vertical
Empedans	50 Ω
Anten Kazancı	1.4 (121.5 MHz) 1.5 (243 MHz) 1.5 (406 MHz)
VSWR	1.5 (121.5 MHz) 1.5 (243 MHz) 1.2 (406 MHz)
Band Genisligi	121.5 MHz / 9 MHz 243 MHz / 5 MHz 406 MHz / 19 MHz
Maksimum Giriş Gücü	50 W

MEKANİK 	
Konnektör Tipi	BNC / Özelleştirilebilir
Anten Rengi	Siyah / Özelleştirilebilir
Uzunluk	14" maksimum
Çap	Isıyıcı 10 mm
Ağırlık	255 gr maksimum




VSWR

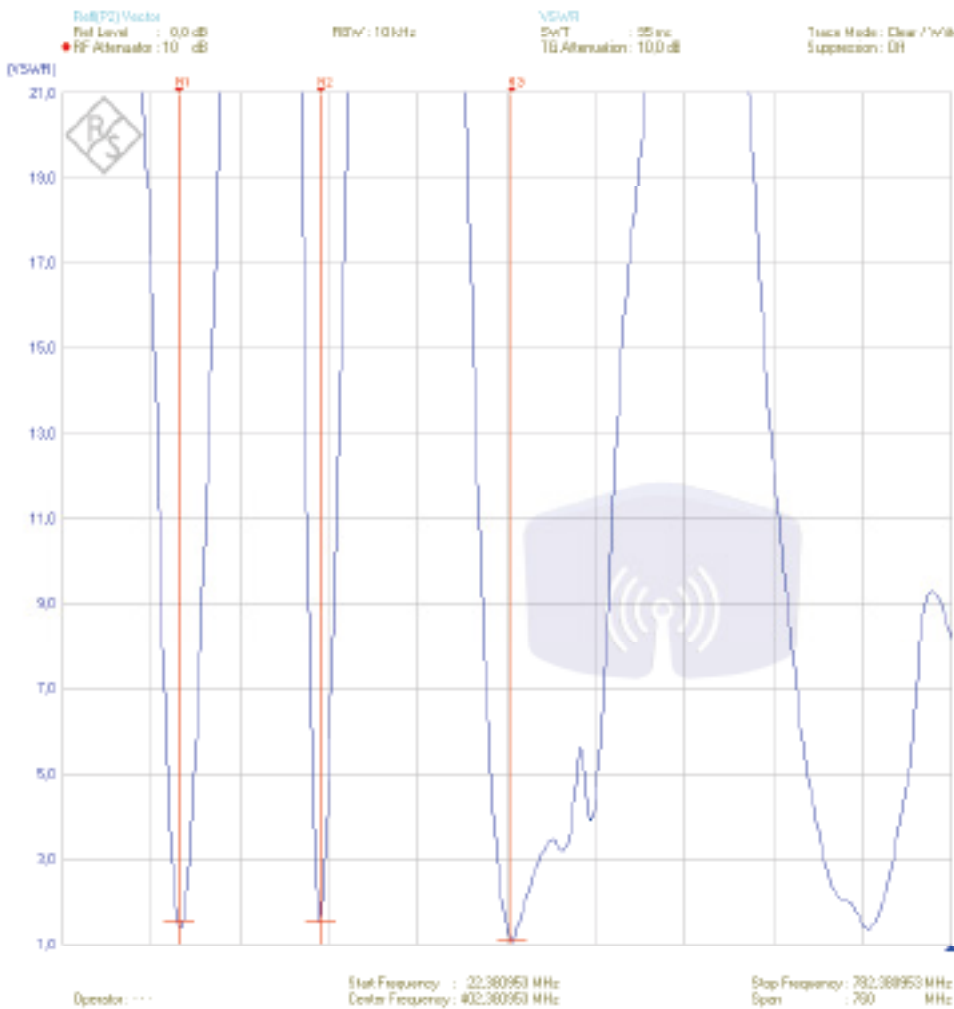

Measurement Setup		
Name	Scope [1]	
Date	15/10/2022	
Time	10:21:15	
Instrument	FSH9 - 106415/838	
Firmware Version	V2.50	
Instrument Mode	Network Analyzer	
Meas Mode	Vector	
Bridge Mode	522	
Format	VSWR	
Calibration State	Cal	
Aperture Stop	...	
UpLink	...	
DownLink	...	
Channel	...	
Center Frequency	432.380953 MHz	
Frequency Offset	0 Hz	
Span	790 MHz	
Ref Level	0.0 dB	
Ref Offset	0.0 dB	
Range	21	
RF Attenuator	Manual	
RF Attenuator	10 dB	
Preamplifier	Off	
RF Input	50 Ohm	
TG Attenuator	10.0 dB	
TG Power	-10.0 dBm	
TG Offset	0.0 dB	
RBW	10 Hz	
SWT	35	
Trigger Mode	Free Run	
Trigger Level	...	
Trigger Delay	...	
Trace Mode	Clear / Write	
Trace Math	Off	
Trace Detector	Sample	
Limit Line 1	...	
Limit Line 2	...	
Measurement Results		
Result Limit Line 1	...	
Result Limit Line 2	...	
Average Count	...	
Markers		
M1:	121.5 MHz:	1.951
M2:	249 MHz:	1.527
M3:	436 MHz:	1.075

GERİ DÖNÜŞ KAYBI

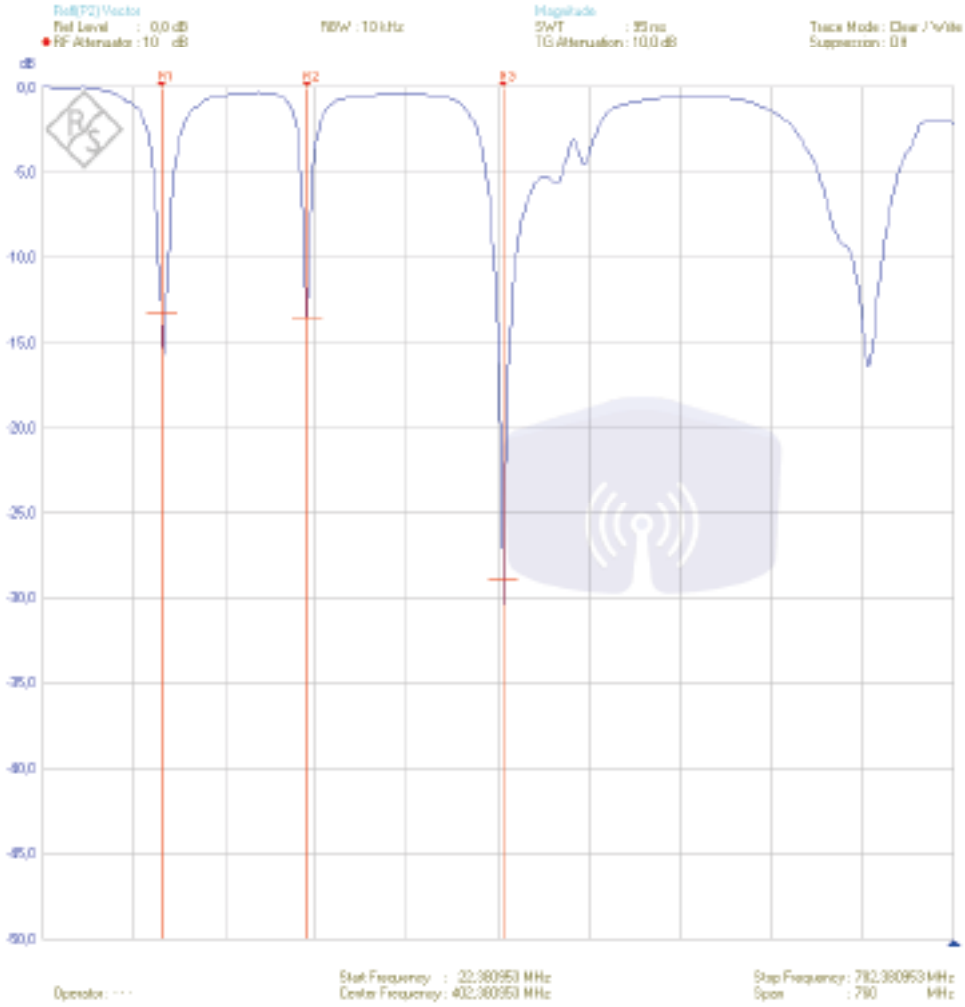


Measurement Setup	
Name	Spectrum (1)
Date	75/10/2002
Time	10:21:15
Instrument	FSH8-186410/028
Firmware Version	V2.53
Instrument Mode	Network Analyzer
Meas Mode	Vector
Edge Mode	S22
Format	Magnitude
Calibration State	Cal
Aperture Stops	---
UpLink	---
DownLink	---
Channel	---
Center Frequency	402.380953 MHz
Frequency Offset	0 Hz
Span	760 MHz
Ref Level	0.0 dB
Ref Offset	0.0 dB
Range	50 dB
RF Attenuation	Manual
RF Attenuator	10 dB
Preamplifier	Off
RF Input	50 Ohm
TG Attenuation	10.0 dB
TG Power	-10.0 dBm
TG Offset	0.0 dB
RBW	10 MHz
SWT	35 ns
Trigger Mode	Free Run
Trigger Level	---
Trigger Delay	---
Trace Mode	Clear / Write
Trace Math	Off
Trace Detector	Sample
Limit Line 1	---
Limit Line 2	---

Measurement Results	
Result Limit Line 1	---
Result Limit Line 2	---
Average Count	---

Markers	
M1	121.5 MHz : -11.31 dB
M2	243 MHz : -11.81 dB
M3	406 MHz : -28.85 dB

GİRİŞ EMPEDANSI

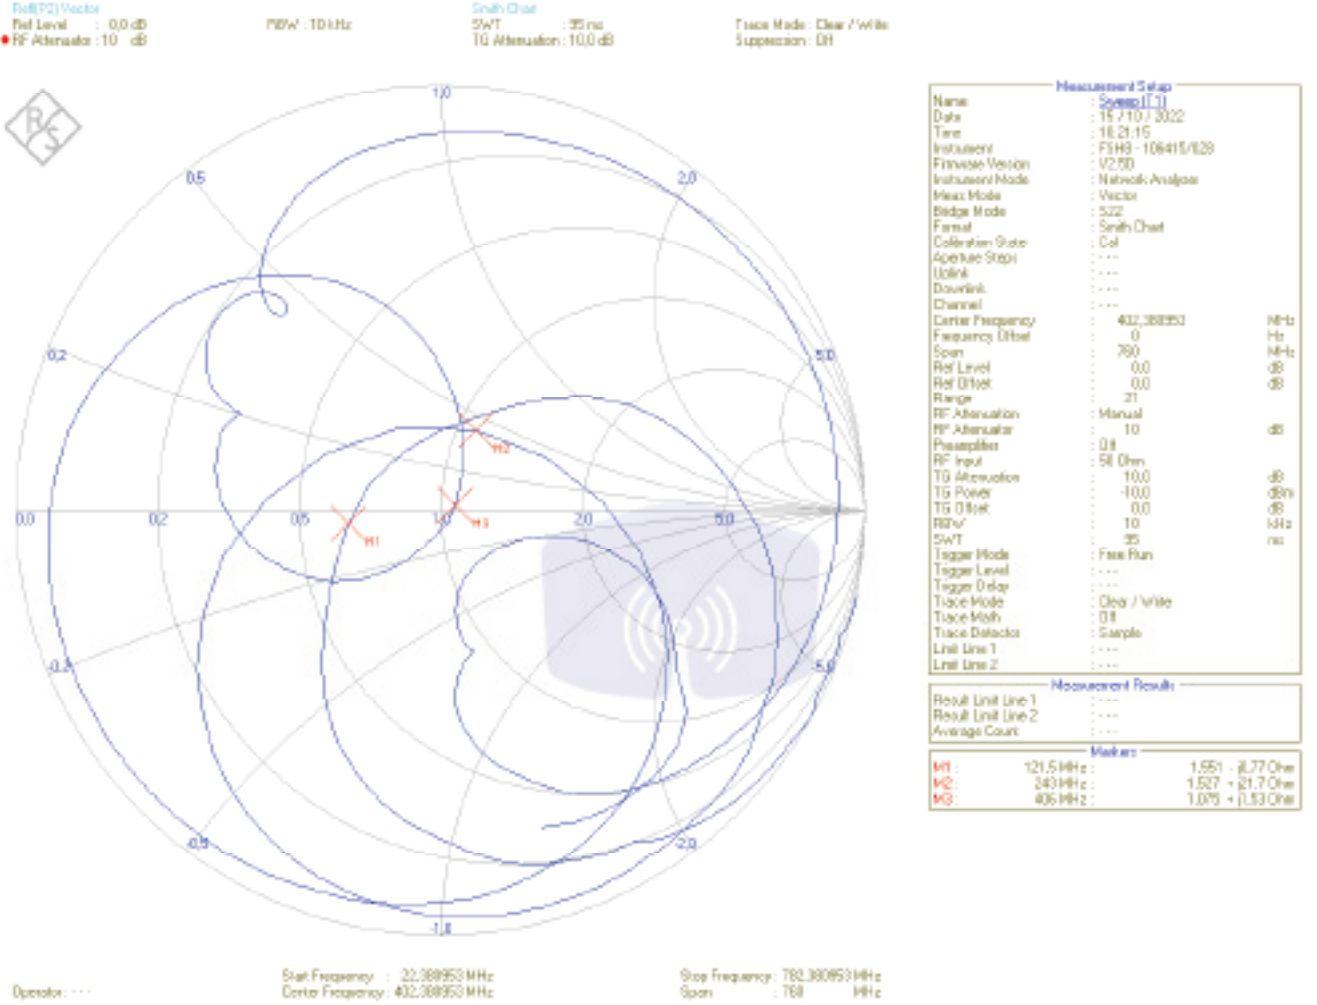

Siparis Detayları

Siparis Linki:

<http://www.kuvayitechnologies.com/>

Çağış Mah. Çağış B.M SK. NO: 340 /16-
İç Kapı No: 60-BİGADİÇ/ BALIKESİR

Sales: +90 505 116 27 05

e-mail: info@kuvayitechnologies.com

Web: <http://www.kuvayitechnologies.com/>