

KVY-1400M-DPL-B-IPEX

ÇOK YÖNLÜ ANTEN (OMNI)





VERSİYON: 1.1


TARİH: 30.07.2022

KUVAYI TECHNOLOGIES A.Ş

## ÖZELLİKLER


ELEKTRİKSEL 	
Model	KVY-1400M-DPL-B-IPEX
Frekans	1400 MHz
Patern Tipi	Çok Yönlü (Omni)
Polarizasyon	Dikey
Empedans	50 $\Omega$
Kazanç	2 dBi
VSWR	< 1.5:1
Band Genisligi	1350-1450 MHz
Maksimum Giriş Gücü	50W

MEKANİK 	
Konnektör Tipi	SMA Plug (male) (0°,45°,90°)
Anten Rengi	Siyah
Uzunluk	9 cm
Çap	8 mm
Ağırlık	9 gr

ÇEVRE KOŞUL 	
Operasyonel Çalışma Sıcaklığı	-30° to +60°C
Depolama Sıcaklığı	-30° to +75°C
IP Koruma Sınıfı	-




# VSWR

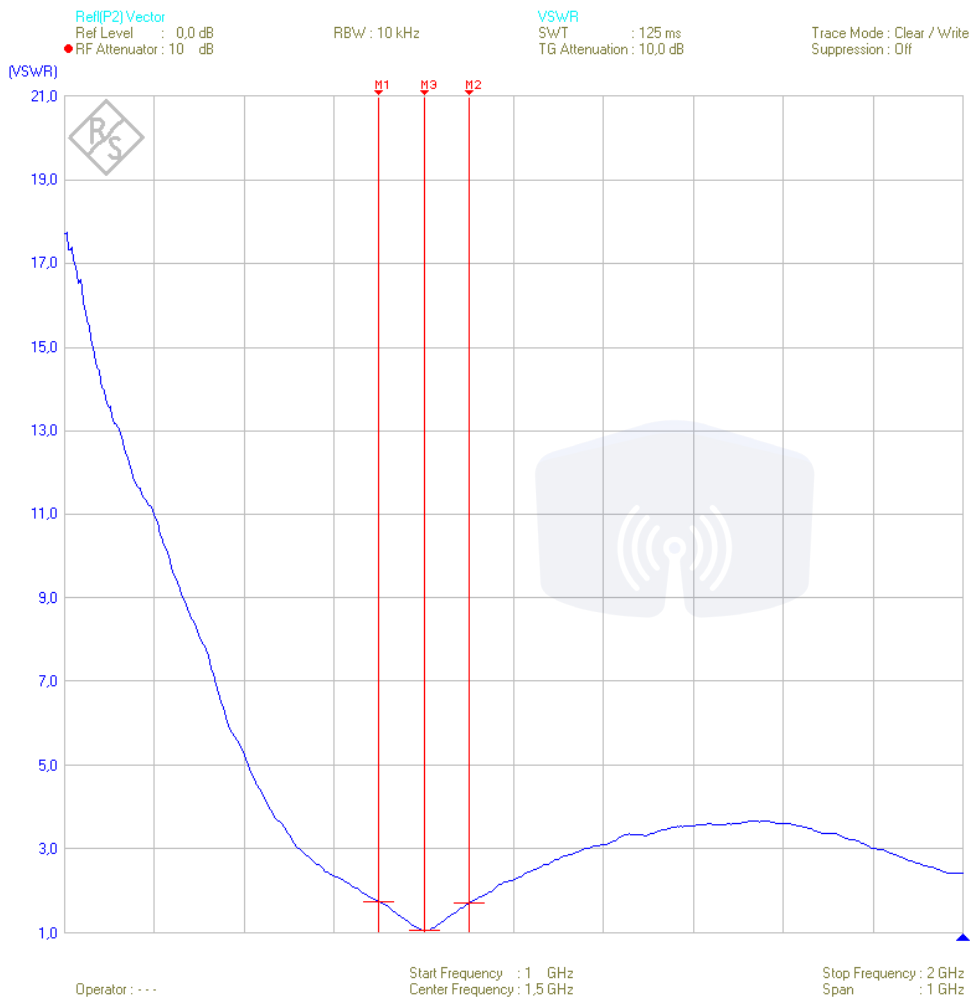


Measurement Setup	
Name	Sweep [T1]
Date	30 / 7 / 2022
Time	16:05:04
Instrument	FSH8 - 106415/028
Firmware Version	V2.50
Instrument Mode	Network Analyzer
Meas Mode	Vector
Bridge Mode	S22
Format	VSWR
Calibration State	Cal
Aperture Steps	...
Uplink	...
Downlink	...
Channel	...
Center Frequency	1,5 GHz
Frequency Offset	0 Hz
Span	1 GHz
Ref Level	0,0 dB
Ref Offset	0,0 dB
Range	21
RF Attenuation	Manual
RF Attenuator	10 dB
Preamplifier	Off
RF Input	50 Ohm
TG Attenuation	10,0 dB
TG Power	-10,0 dBm
TG Offset	0,0 dB
RBW	10 kHz
SWT	125 ms
Trigger Mode	Free Run
Trigger Level	...
Trigger Delay	...
Trace Mode	Clear / Write
Trace Math	Off
Trace Detector	Sample
Limit Line 1	...
Limit Line 2	...
Measurement Results	
Result Limit Line 1	...
Result Limit Line 2	...
Average Count	...
Markers	
M1:	1,35 GHz : 1,736
M2:	1,45 GHz : 1,708
M3:	1,4 GHz : 1,050

# GERİ DÖNÜŞ KAYBI

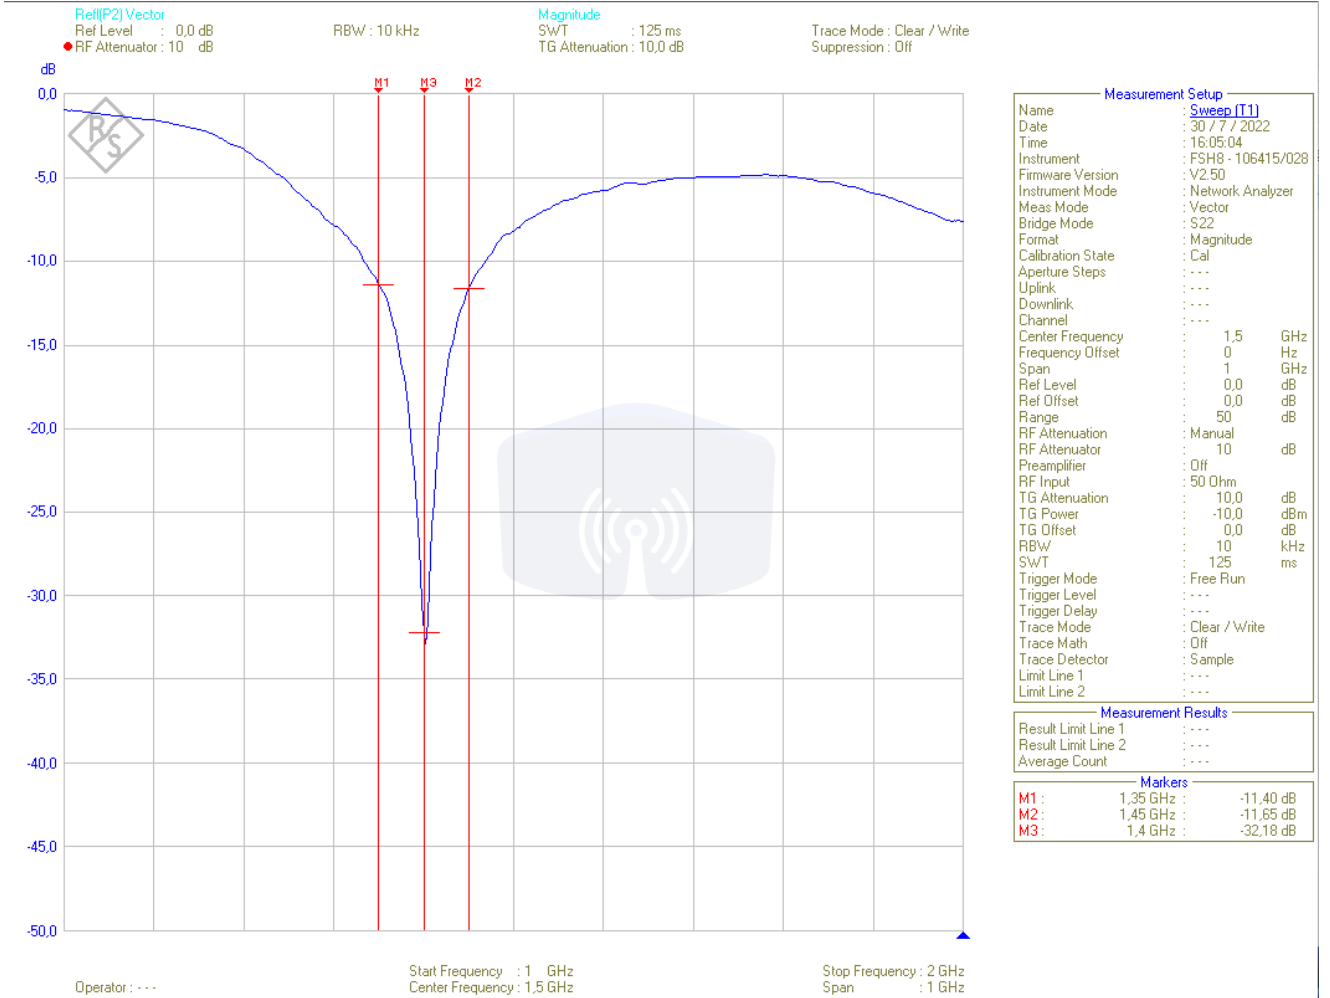

# GİRİŞ EMPEDANSI

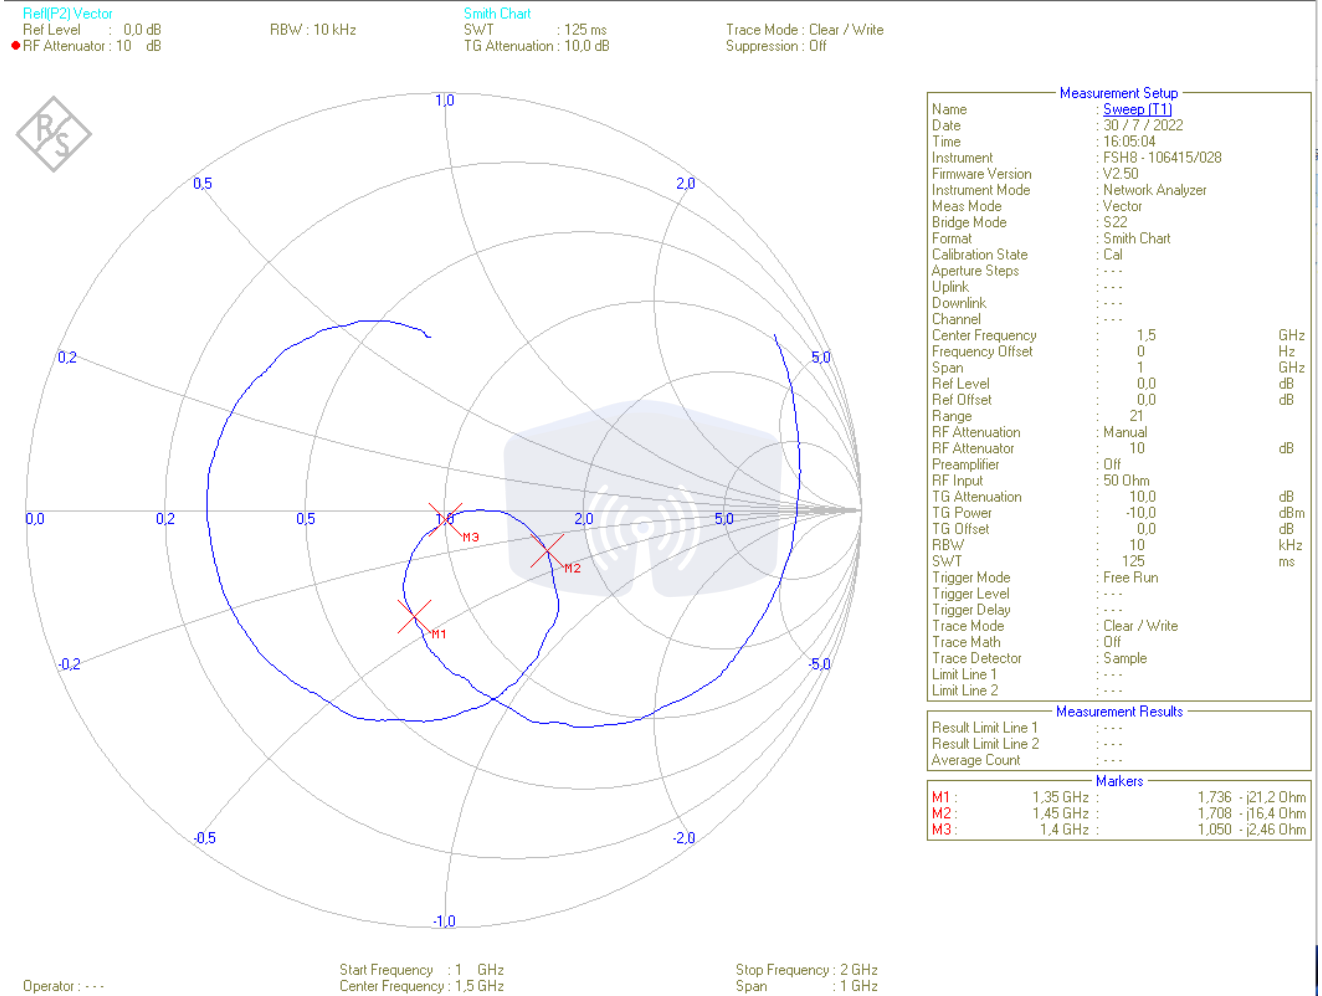

## Siparis Ayrıntıları

Siparis Linki:

<http://www.kuvayitechnologies.com/>

Çağış Mah. Çağış B.M SK. NO: 340 /16-  
İç Kapı No: 60-BİGADİÇ/ BALIKESİR

Satış: +90 505 116 27 05

e-mail: [info@kuvayitechnologies.com](mailto:info@kuvayitechnologies.com)

Web: <http://www.kuvayitechnologies.com/>