

KVY-770M-DPL-B

ÇOK YÖNLÜ ANTEN (OMNI)




VERSİYON: 1.1


TARİH: 06.08.2022

KUVAYI TECHNOLOGIES A.Ş

## ÖZELLİKLER


ELEKTRİKSEL 	
Model	KVY-770M-DPL-B
Frekans	770 MHz
Patern Tipi	Çok Yönlü (Omni)
Polarizasyon	Dikey
Empedans	50 $\Omega$
Kazanç	2 dBi
VSWR	< 1.5:1
Band Genisligi	745-795 MHz
Maksimum Giriş Gücü	50W

MEKANİK 	
Konnektör Tipi	SMA Plug (male) (0°,45°,90°)
Anten Rengi	Siyah
Uzunluk	200 mm
Çap	15 mm
Ağırlık	20 gr

ÇEVRE KOŞUL 	
Operasyonel Çalışma Sıcaklığı	-30° to +60°C
Depolama Sıcaklığı	-30° to +75°C
IP Koruma Sınıfı	




# VSWR

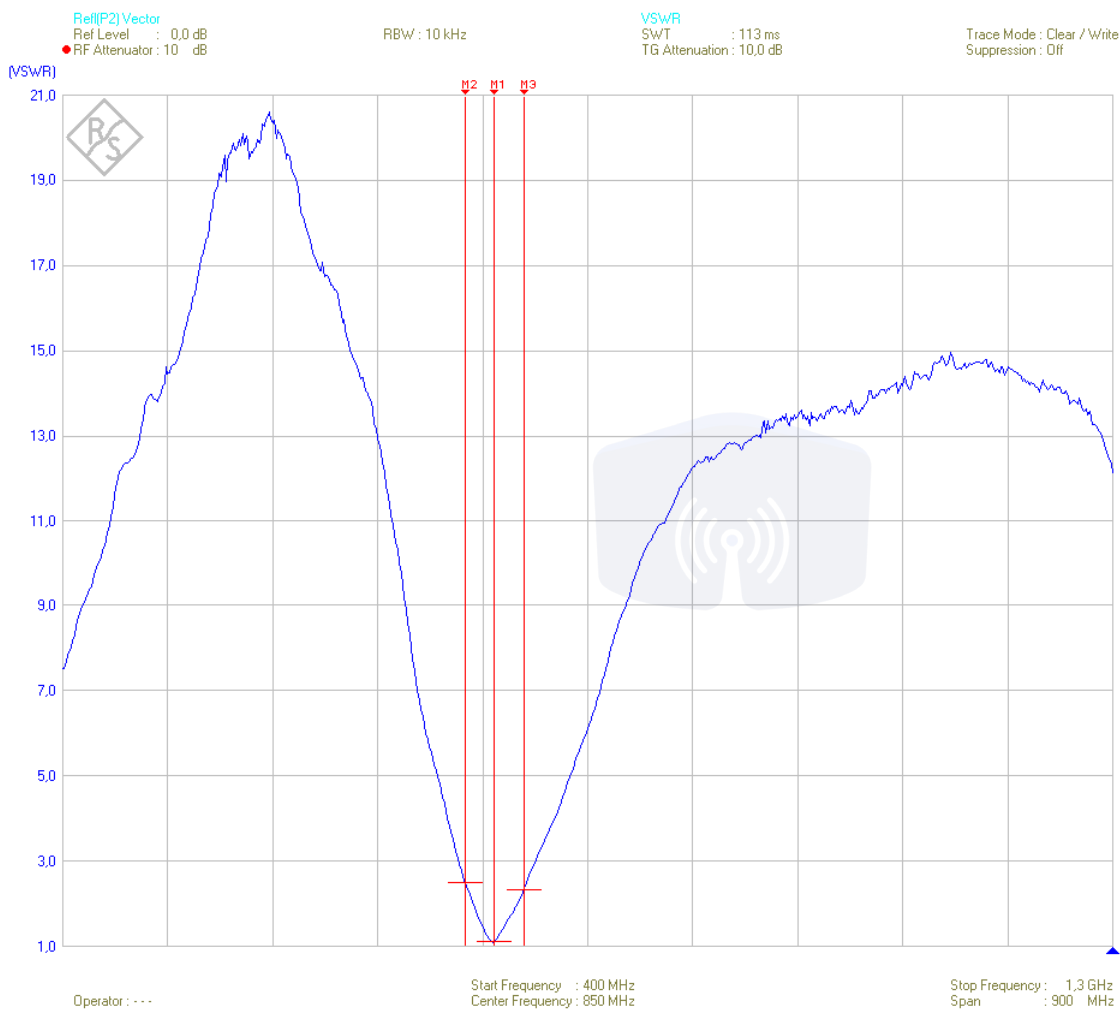


Measurement Setup	
Name	Sweep [T1]
Date	3/7/2022
Time	15:04:32
Instrument	FSH8 - 106415/028
Firmware Version	V2.50
Instrument Mode	Network Analyzer
Meas Mode	Vector
Bridge Mode	S22
Format	VSWR
Calibration State	Cal
Aperture Steps	...
Uplink	...
Downlink	...
Channel	...
Center Frequency	850 MHz
Frequency Offset	0 Hz
Span	900 MHz
Ref Level	0,0 dB
Ref Offset	0,0 dB
Range	21
RF Attenuation	Manual
RF Attenuator	10 dB
Preamplifier	Off
RF Input	50 Ohm
TG Attenuation	10,0 dB
TG Power	-10,0 dBm
TG Offset	0,0 dB
RBW	10 kHz
SWT	113 ms
Trigger Mode	Free Run
Trigger Level	...
Trigger Delay	...
Trace Mode	Clear / Write
Trace Math	Off
Trace Detector	Sample
Limit Line 1	...
Limit Line 2	...

Measurement Results	
Result Limit Line 1	...
Result Limit Line 2	...
Average Count	...
Markers	
M1 :	770 MHz : 1,112
M2 :	745 MHz : 2,496
M3 :	795 MHz : 2,320

# GERİ DÖNÜŞ KAYBI

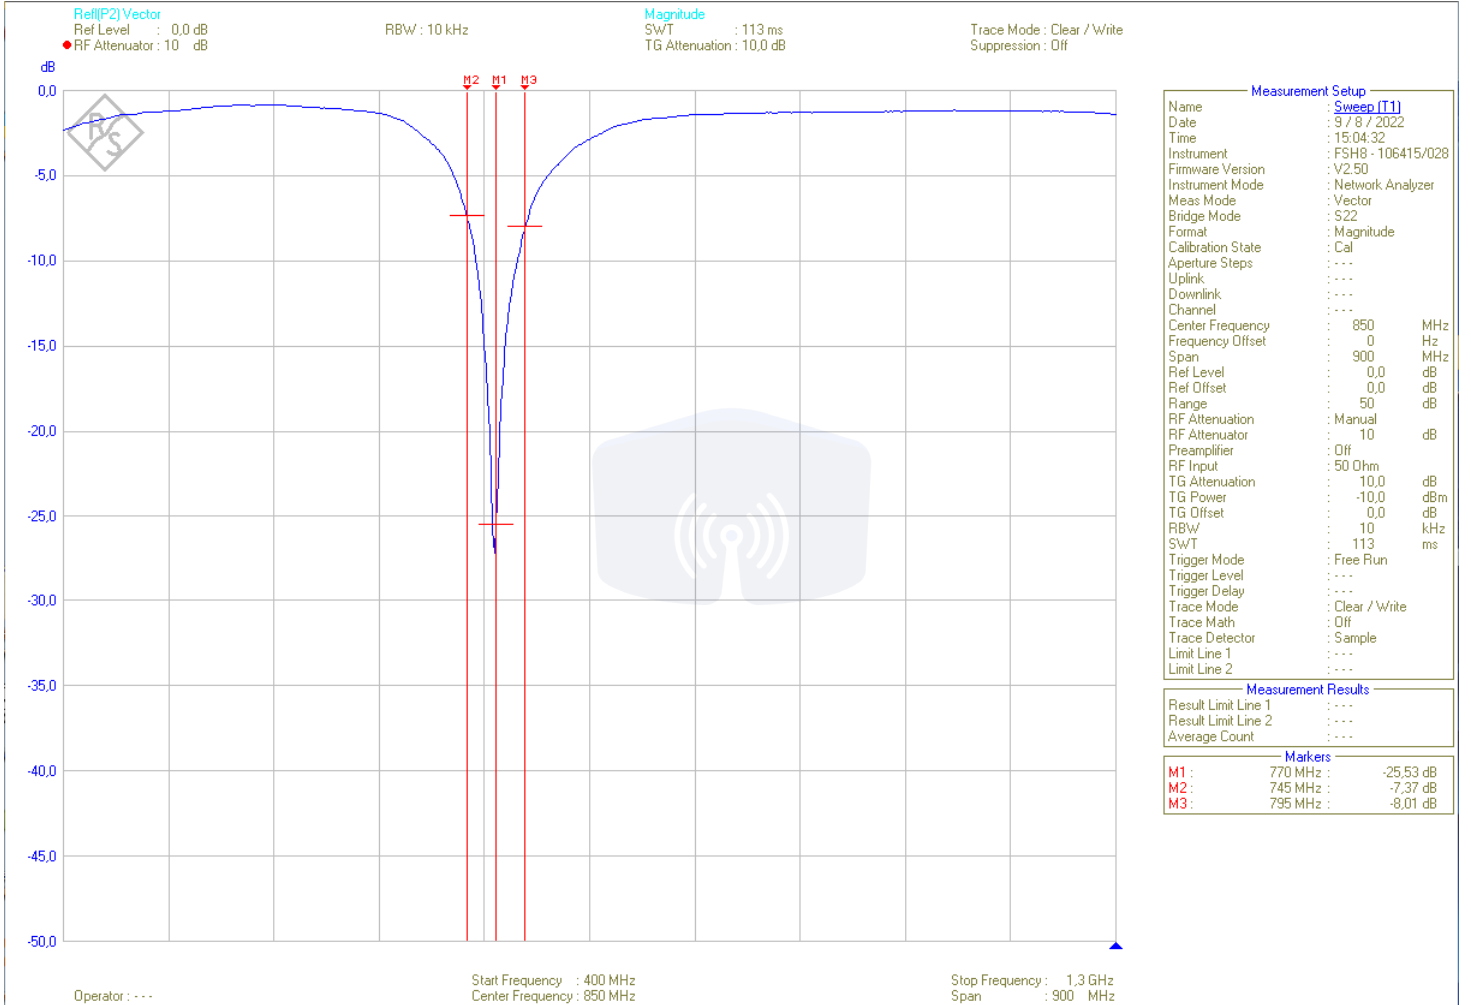

# GİRİŞ EMPEDANSI

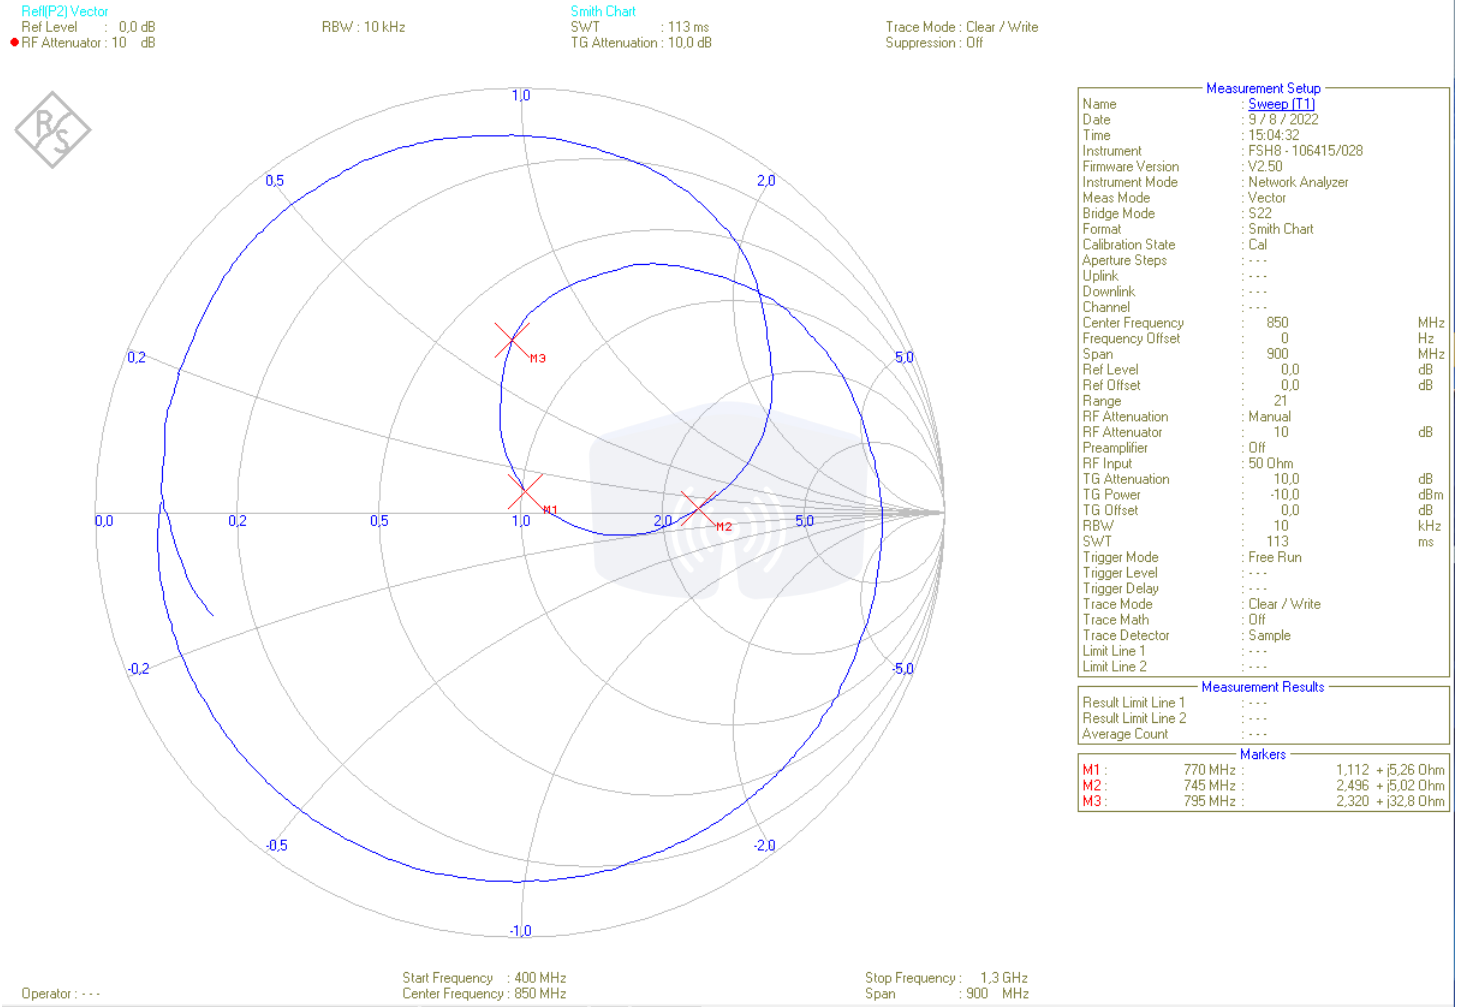

## Siparis Ayrıntıları

Siparis Linki:

<http://www.kuvayitechnologies.com/>

Çağış Mah. Çağış B.M SK. NO: 340 /16-  
İç Kapı No: 60-BİGADİÇ/ BALIKESİR

Satış: +90 505 116 27 05

e-mail: [info@kuvayitechnologies.com](mailto:info@kuvayitechnologies.com)

Web: <http://www.kuvayitechnologies.com/>